



DIRECTIONALS




3510 SERIES

SAE Class I Surface Mount

The 3510 surface mount LED warning light is designed to offer maximum performance with minimum size. This slimline LED measures only 83.8 x 27.9mm and only 10.2mm deep, comprised of 24 1-watt high-intensity LEDs in an ultra compact housing. Its small footprint allows for mounting in almost any location on a vehicle body. It is synchronisable with additional units and any Hide-A-LED model. The 3510 includes 16 flash patterns and is available in amber, blue, clear and red (colourless when not illuminated). Additional benefits of LED technology include high-intensity light output, low current draw and long maintenance-free service life.

Dimensions

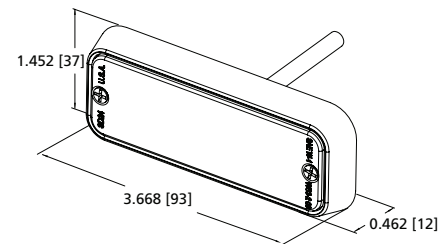

Models

PART NO.	VDC	AMPS	MOUNT
3510X	12-24	0.75	Surface

Replace X in part number with desired LED color: A = amber, B = blue, C = clear, G = green, R = red

Features and Benefits

- 24 1-watt high-intensity LEDs provide exceptional warning
- 16 flash patterns including single, double, triple, quad, deci and cycle all
- Synchronisable with additional 3510s and Hide-A-LEDs
- In-line waterproof driver module allows for premium functionality and compact size
- UV stabilised polycarbonate lens and pre-wired 228mm cable
- Colourless when not illuminated
- SAE J595 Class I (Amber, Blue, Clear & Red)
- Temperature Range: -30°C to +50°C

Flash Patterns (16)

- Quad
- Double
- Triple
- Deciblast
- Single
- Mega
- Triple + burst
- Steady Burn
- Cycle
- Double - triple + burst
- Cycle classic
- Quad-mega
- Single-quad
- Deciblast - quad
- Single - triple - deciblast
- Mega - triple + burst

Accessories

- Chrome bezel: A3510BZC
- L bracket: A3510L
- Multi-angle bracket: A3510MA

